


Scale: 1" = 30'

### LEGEND

-X-X-X-X- SILT FENCE  
 INLET PROTECTION  
 RIP RAP W/ FILTER BLANKET

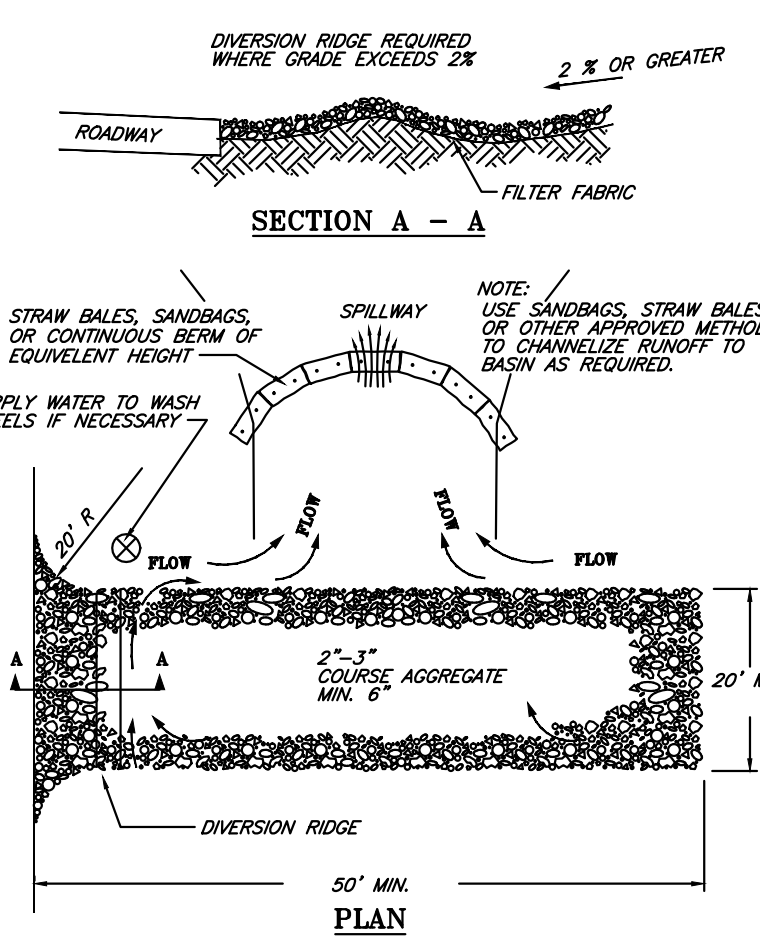

#### TEMPORARY GRAVEL CONSTRUCTION ENTRANCE/EXIT

*nts*

NOTES:  
1. THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION THAT WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHT-OF-WAYS. THIS MAY REQUIRE TOP DRESSING, REPAIR AND/OR CLEANTUP OF ANY MEASURES USED TO TRAP SEDIMENT.  
2. WHEN NECESSARY, WHEELS SHALL BE CLEANED PRIOR TO ENTRANCE ONTO PUBLIC RIGHT-OF-WAY.  
3. WHEN WASHING IS REQUIRED, IT SHALL BE DONE ON AN AREA STABILIZED WITH CRUSHED STONE THAT DRAINS INTO AN APPROVED SEDIMENT TRAP OR SEDIMENT BASKIN.

### EROSION CONTROL NOTES

- PRIOR TO CLEARING, A SILT FENCE BACKED WITH 4' HOG WIRE FENCE (AS REQUIRED TO RETAIN SEDIMENT) TRENCHED 6 INCHES DEEP AND BACKFILLED ON THE UPHILL SIDE, REINFORCED WITH HAY BALES (THAT ARE TRENCHED 4 INCHES DEEP, BACKFILLED ON THE UPHILL SIDE, AND STAKED WITH AT LEAST TWO 2" X 2" WOODEN STAKES) SHALL BE INSTALLED AROUND THE PERIMETER OF THE SITE. A DOUBLE ROW OF SILT FENCE REINFORCED WITH PROPERLY INSTALLED HAY BALES (WITH THE SAME INSTALLATION AS ABOVE) IN ADDITION TO A VEGETATIVE BARRIER SHALL BE PLACED AROUND THE VEGETATIVE BUFFERS AS SHOWN ON SITE PLAN. REFER TO DETAIL THIS SHEET. SILT FENCE MUST NOT BE TRENCHED WITHIN THE CPZ OF ANY TREES TO BE PROTECTED.
- DURING THE CLEARING, GRUBBING AND SITE GRADING STAGES, AREAS THAT ARE DISTURBED MORE THAN 7 DAYS SHALL BE STABILIZED WITH RYE GRASS APPLIED AT MANUFACTURER'S RECOMMENDATIONS. AFTER SEEDING, EACH AREA SHALL BE MULCHED WITH 4,000 POUNDS OF STRAW PER ACRE. ALL EXPOSED SLOPES THAT ARE EQUAL TO OR GREATER THAN 5%, AN EROSION BLANKET SHALL BE UTILIZED UNTIL THE AREA ACHIEVES FINAL STABILIZATION.
- AFTER THE INITIAL SITE GRADING WORK, ALL PROPOSED INLET(S)/OUTFALLS, ONCE INSTALLED, SHALL BE PROTECTED FROM EROSION AND SEDIMENT RUNOFF BY THE USE OF FILTER FABRIC AND PROPERLY INSTALLED HAY BALES. DISTURBED PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITIES HAVE PERMANENTLY CEASED OR ARE TO BE LEFT IDLE FOR MORE THAN 14 DAYS SHALL BE STABILIZED WITH PERMANENT SEED OR OTHER PERMANENT STABILIZATION METHODS. SEEDING SHALL BE THE SAME AS IN TEMPORARY SEEDING.
- TEMPORARY SEEDING SHALL BE RYE GRASS APPLIED AT MANUFACTURER'S RECOMMENDATIONS TO ANY DISTURBED AREAS THAT ARE INACTIVE MORE THAN 7 DAYS. SOD SHALL BE USED TO STABILIZE DISTURBED AREAS.
- VEGETATIVE BUFFER AREAS SHALL BE LEFT UNDISTURBED WITH THE EXCEPTION OF REQUIRED SUPPLEMENTAL PLANTINGS WITHIN THE BUFFER AREAS. REFER TO LANDSCAPE PLAN FOR PLANTING LOCATIONS.
- ALL SEDIMENT IS TO BE CAPTURED ON-SITE. ANY SEDIMENT ESCAPING THE SITE WILL BE REQUIRED TO BE REMOVED AND RESTORED INCLUDING THE TRACKING OF SOIL ON STREETS.
- A GRAVEL CONSTRUCTION ENTRANCE SHALL BE REQUIRED. LOCATION TO BE COORDINATED WITH RAM AND OWNER.

### MAINTENANCE AND INSPECTION SCHEDULE

- SILT FENCE SHALL BE INSPECTED AT LEAST WEEKLY. ANY REQUIRED REPAIRS SHALL BE MADE IMMEDIATELY. SEDIMENT DEPOSITS SHALL BE REMOVED WHEN THEY REACH APPROXIMATELY ONE-HALF THE HEIGHT OF THE BARRIER.
- MAINTENANCE SHALL BE PERFORMED ON THE ROCK ENTRANCE WHEN ANY VOID SPACES ARE FULL OF SEDIMENT.
- HAY BALES SHALL BE USED IN AREAS WHERE EFFECTIVENESS IS REQUIRED FOR LESS THAN 3 MONTHS. INSPECTION OF THE HAY BALES SHALL TAKE PLACE IMMEDIATELY AFTER EACH RAINFALL AND ANY REQUIRED REPAIRS SHALL BE MADE IMMEDIATELY.
- INLET(S)/OUTFALLS SHALL BE INSPECTED IMMEDIATELY AFTER EACH RAIN EVENT AND ANY REQUIRED REPAIRS TO THE HAY BALES, SILT FENCE, OR FILTER FABRIC SHALL BE PERFORMED IMMEDIATELY.
- BARE AREAS OF THE SITE THAT WERE PREVIOUSLY SEEDED SHALL BE RESEDED PER MANUFACTURER'S INSTRUCTIONS.
- MULCH AND SOD THAT HAS BEEN WASHED OUT SHALL BE REPLACED IMMEDIATELY.
- MAINTAIN ALL OTHER AREAS OF THE SITE WITH PROPER CONTROLS AS NECESSARY.

GOODWYN MILLS CAWOOD

11 North Water Street, Suite 15250 | Mobile, AL 36602  
Tel 251.460.4006 | GMCNETWORK.COM

ISSUE DATE	OWNER REVIEW	06.09.14
	95% SUBMITTAL	10.01.14
	ADDENDUM 1	01.29.15
drawn by:	JWS	
checked by:		

WALTON COUNTY  
CAREER DEVELOPMENT CENTER  
DeFuniak Springs, FL

CMOB140023

CONSTRUCTION

EROSION CONTROL PLAN